




48" OUTSWING HIGH PERFORMANCE SILL  
CLOSE-OUT EXTENSION  
(USED WITH PLAIN FRAME)

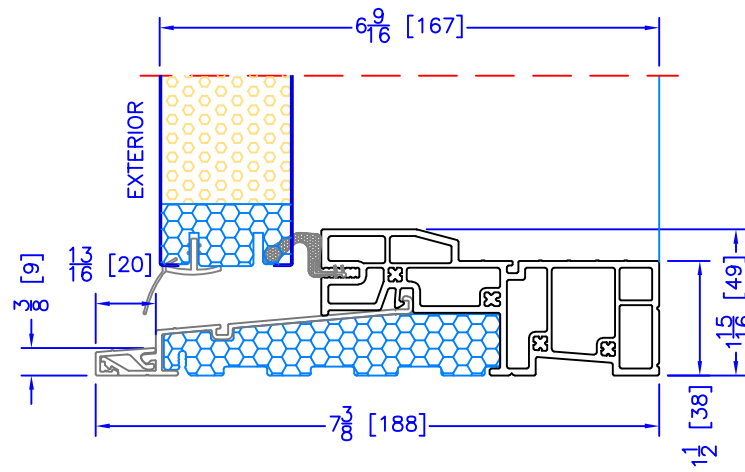


65" OUTSWING HIGH PERFORMANCE SILL  
CLOSE-OUT EXTENSION  
(USED WITH PLAIN FRAME)

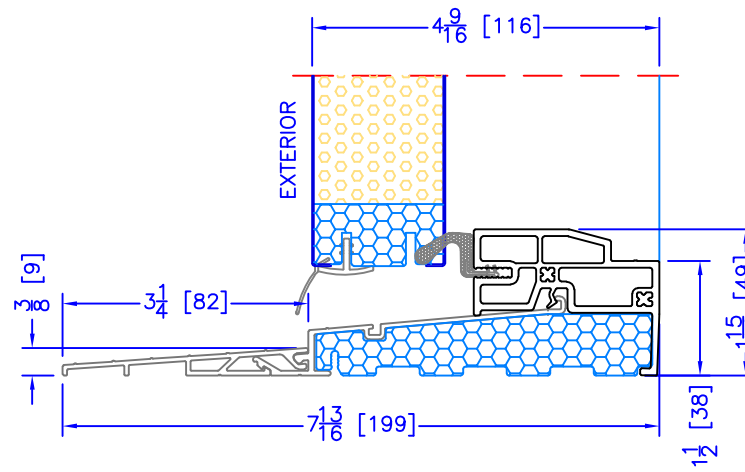


48" OUTSWING HIGH PERFORMANCE SILL  
2 PC ALUMINUM (3/4" EXT)  
(USED WITH 1 1/2" EXTENDED BM/J-TRIM & FLUSH EXTENSION)

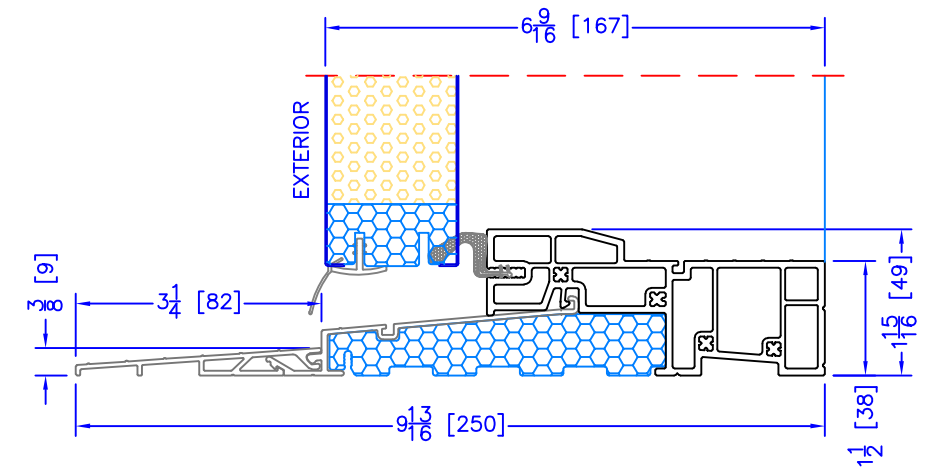


65" OUTSWING HIGH PERFORMANCE SILL  
2 PC ALUMINUM (3/4" EXT)  
(USED WITH 1 1/2" EXTENDED BM/J-TRIM & FLUSH EXTENSION)

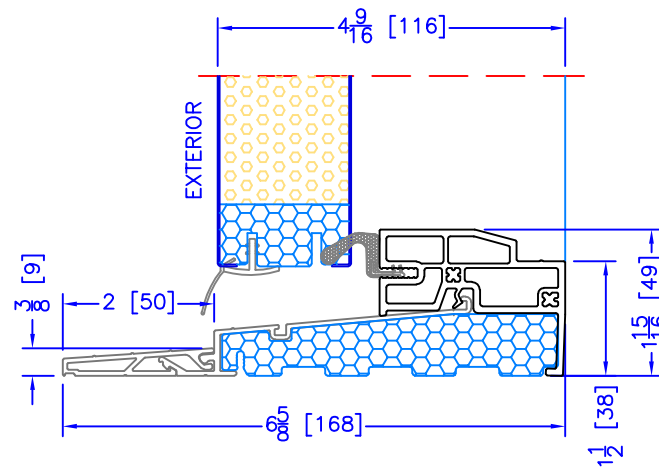


48" OUTSWING HIGH PERFORMANCE SILL  
2 PC ALUMINUM (2" EXT)  
(USED WITH ALL OTHER EXTERIOR OPTIONS)

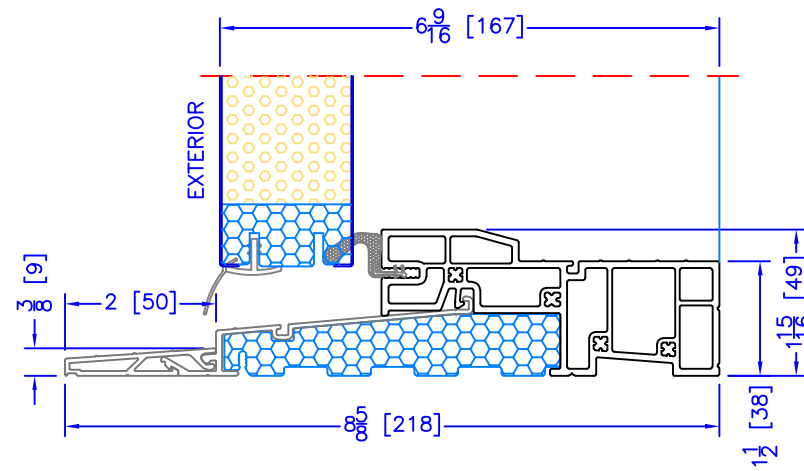

65" OUTSWING HIGH PERFORMANCE SILL  
2 PC ALUMINUM (2" EXT)  
(USED WITH ALL OTHER EXTERIOR OPTIONS)

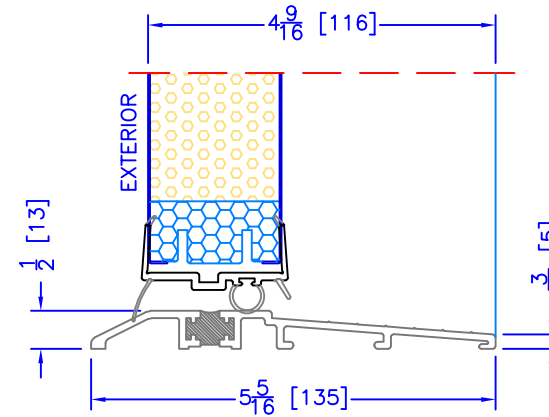

48" OUTSWING ASSISTED LIVING SILL

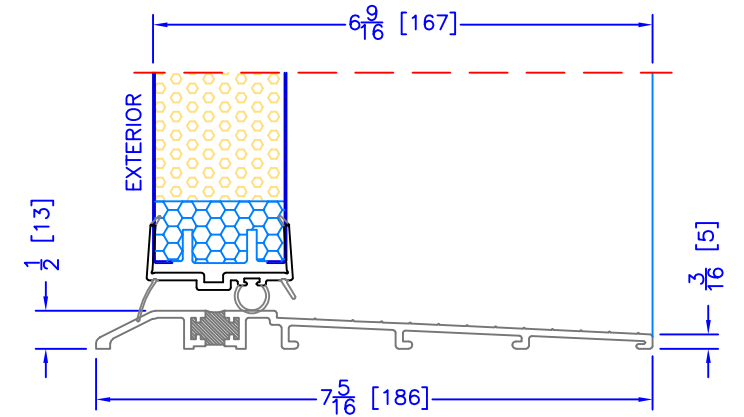

65" OUTSWING ASSISTED LIVING SILL