




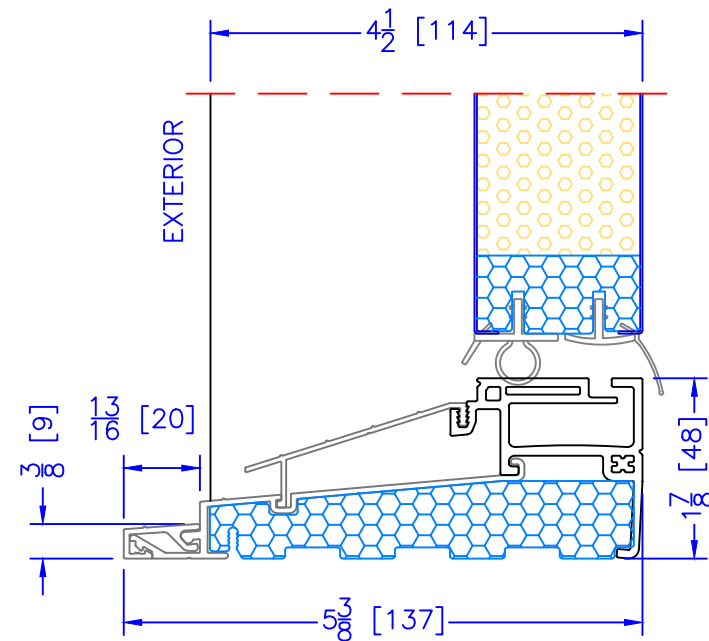


4 1/2" INSWING HIGH PERFORMANCE SILL
CLOSE-OUT EXTENSION
(USED WITH PLAIN FRAME)

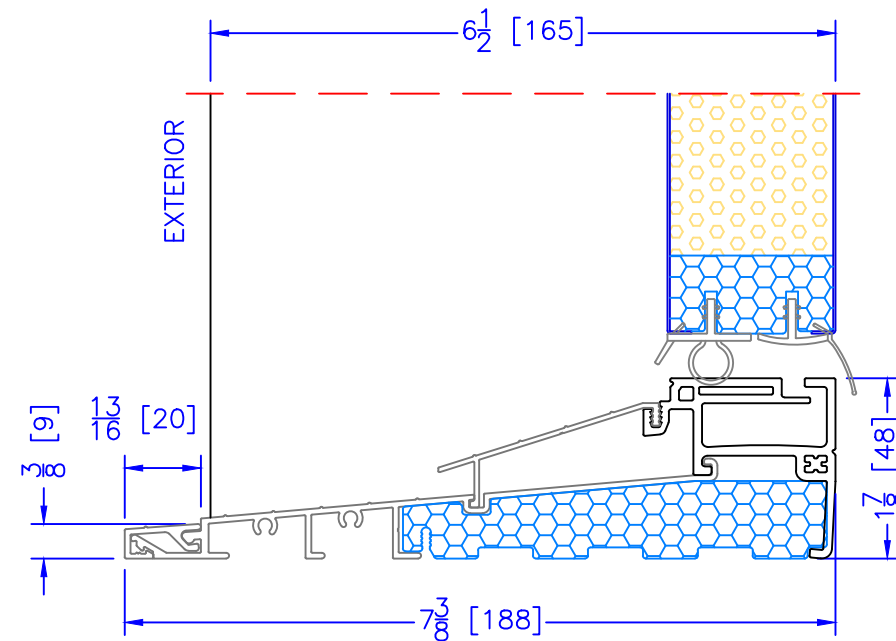


6 1/2" INSWING HIGH PERFORMANCE SILL
CLOSE-OUT EXTENSION
(USED WITH PLAIN FRAME)

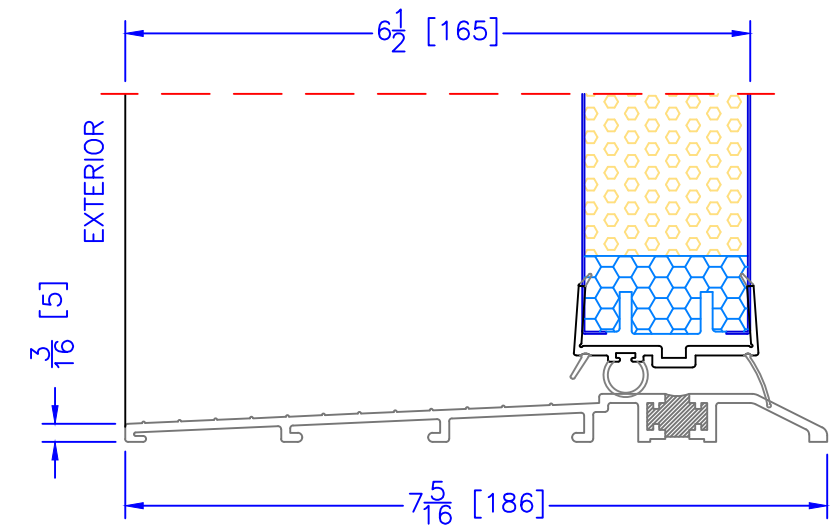


6 1/2" INSWING ASSISTED LIVING SILL

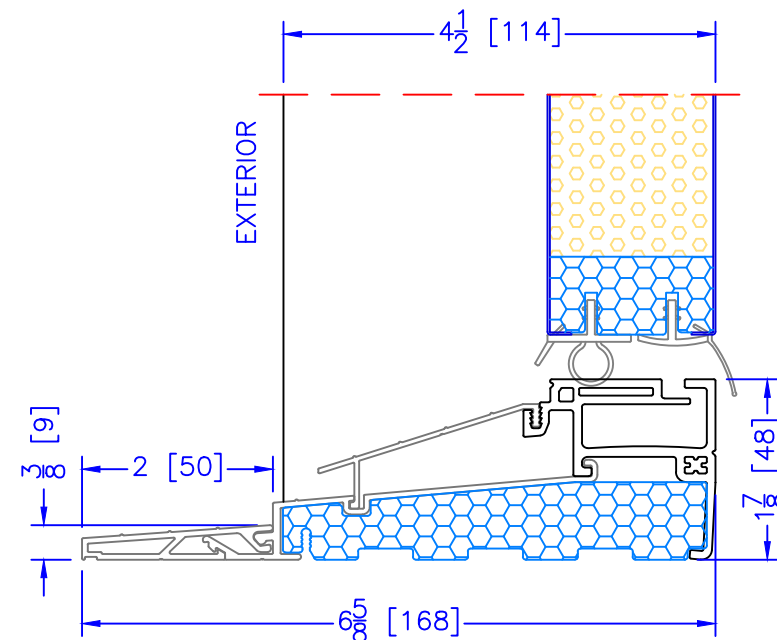

4 1/2" INSWING HIGH PERFORMANCE SILL
2 PC ALUMINUM (2" EXT)
(USED WITH ALL OTHER EXTERIOR OPTIONS)

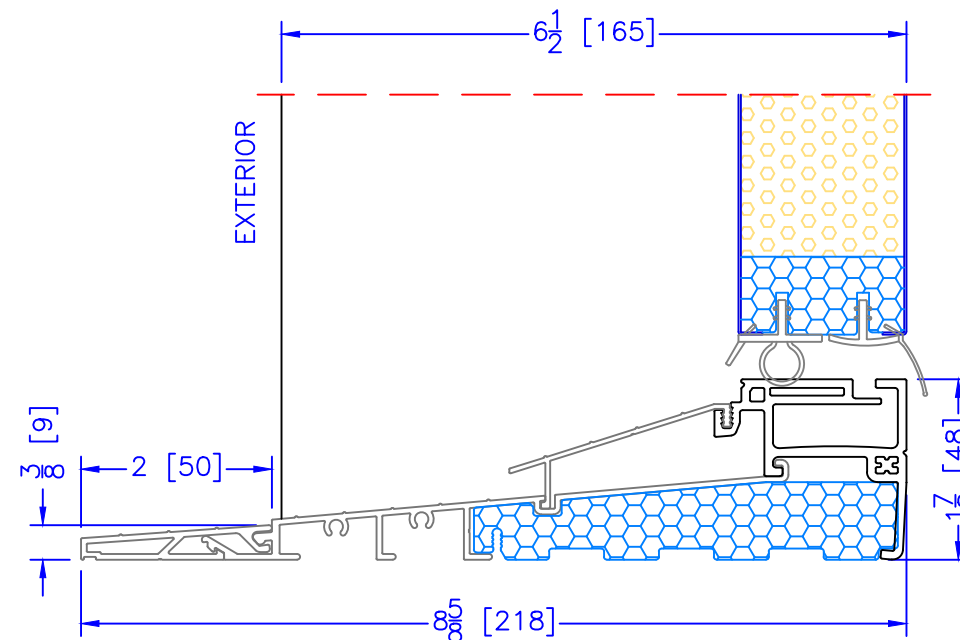

6 1/2" INSWING HIGH PERFORMANCE SILL
2 PC ALUMINUM (2" EXT)
(USED WITH ALL OTHER EXTERIOR OPTIONS)

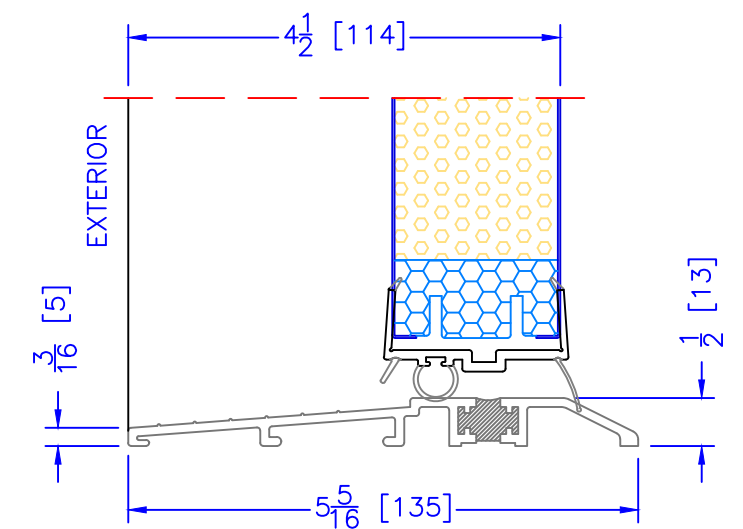

4 1/2" INSWING ASSISTED LIVING SILL